




Subsequent Nut

Nut can be inserted into T slot from slot outside directly while spring leaf hold its position.

Material : zinc plated steel



Reliability	★ ★ ★
Efficiency	★ ★ ★ ★ ★
Cost	★ ★ ★

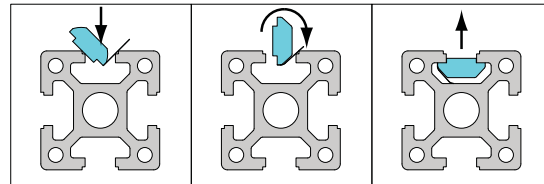


Subsequent Nut-8-M5

Subsequent Nut-8-M6



D	Material	Mass (g/pcs)	Part No.
M6	zinc plated steel	5.0	08.SN.M6



Subsequent Nut-10-M4

Subsequent Nut-10-M5

Subsequent Nut-10-M6

Subsequent Nut-10-M8



D	Material	Mass (g/pcs)	Part No.
M6	zinc plated steel	8.0	10.SN.M6
M8	zinc plated steel	8.0	10.SN.M8